

StrapPack®

Semi-Automatic Strapping Machine



D-53



D-53 LB

D-53

D-53 Series

Semi-Automatic Strapping Machine

■ Variable and Consistent Tension

Stabilized Tensioning that is controlled with a microprocessor can easily be adjusted from 2kgf to 50kgf (4.4 lbs. to 110 lbs.) with a single dial. Tension is applied with a newly developed Steel Roller. In addition, the maximum Tension Range can be limited in order to prevent a damage of valuable package.

■ Seal Prolongation

Longer sealing time (plus 0.5 sec) for Heavy strap can easily be applied. (Option)

■ Desk-like Body

It provides a broad workspace and maximum foot room.

■ Small & Functional

Sealing head is located in the right side of the body in order to utilize the working surface of the tabletop. Machine body is small and light, easy to maneuver, yet strong and sturdy for heavy packages.

■ Quick Heater





Only requires 30 seconds to reach operating temperature.

■ High Speed Cycle

Cycle starts immediately after the strap is inserted into the Band Guide and completes the cycle faster than ever.

■ Strap Size

This model can be used with strap width ranging from 5mm (1/4 in.) to 15.5 mm (5/8 in.)

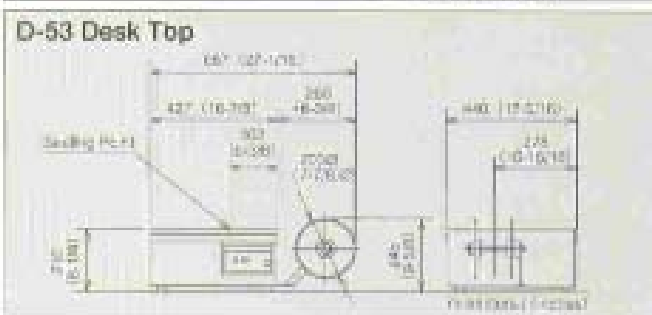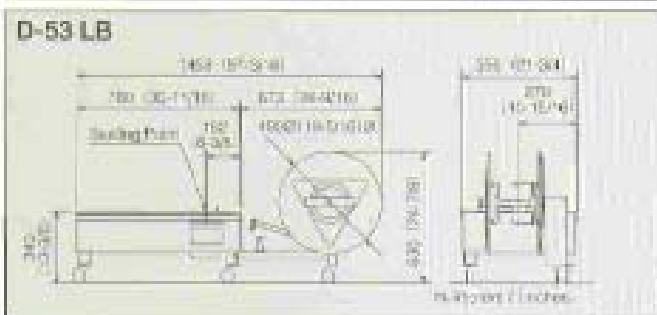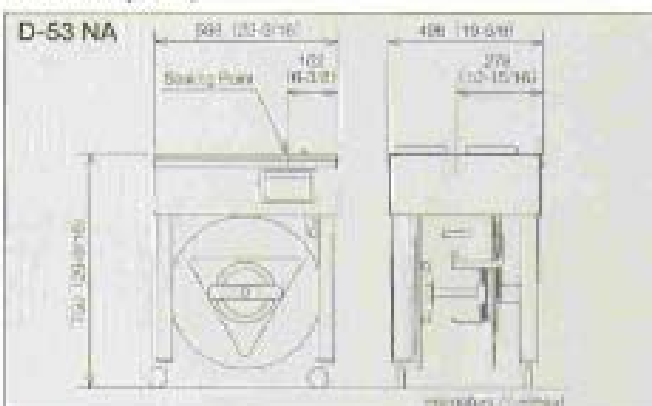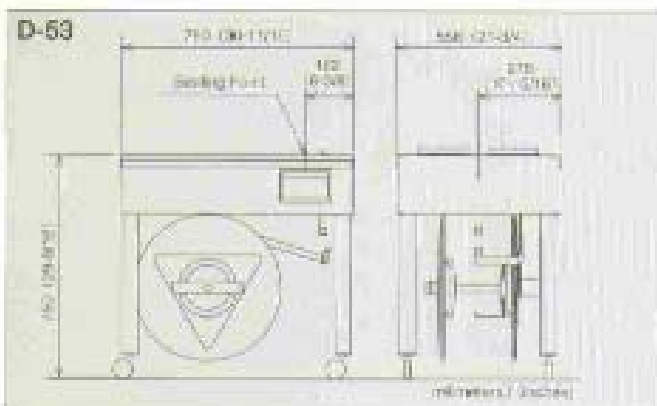

■ Standard Specifications

	millimeters/(inches)				
	D-53	D-53 LB	D-53 NA	D-53 Desk Top	
Dimensions	width	780 (30-11/16)	width 1453 (57-3/16)	width 588 (23-9/16)	width 887 (34-13/16)
	depth	556 (21-3/4)	body width 790 (30-11/16)	depth 498 (19-5/8)	body width 427 (16-7/8)
	table height	750 (29-9/16)	depth 556 (21-3/4)	table height 750 (29-9/16)	depth 440 (17-5/16)
	height	775 (30-1/2)	table height 340 (13-3/8)	height 775 (30-1/2)	table height 210 (8-1/4)
Weight	90kg (110 lbs)	height 630 (24-7/8)	height 45kg (99 lbs)	height 245 (9-5/8)	
Package Size		width 160 (3-15/16) - free	height 30 (1-1/4) - free		
Strap Width		5, 6, 9, 12 or 15.5 (1/4, 3/8, 1/2, or 5/8)			
Power Supply		100, 220, 240V single phase 50/60Hz 0.4KVA			

Modification rights reserved

Pats., U.M. & design registered and/or pending.

© 2000 Strapack Corporation

DISTRIBUTED BY:

STRAPACK CORPORATION

1-2-17, Higashi Shinbashi, Minato-ku, Tokyo 105-0021, JAPAN
 Phone 81-3-3229-1121 Fax: 81-3-3229-1154
 (URL) <http://www.strapack.com>
 (E-mail) info@strapack.com

STRAPACK INC.

32850 San Clemente St. Hayward, CA 94544 U.S.A.
 Phone 1-510-475-0000 Fax: 1-510-475-0800