


StrapPack®

Pallet Strapping Machine

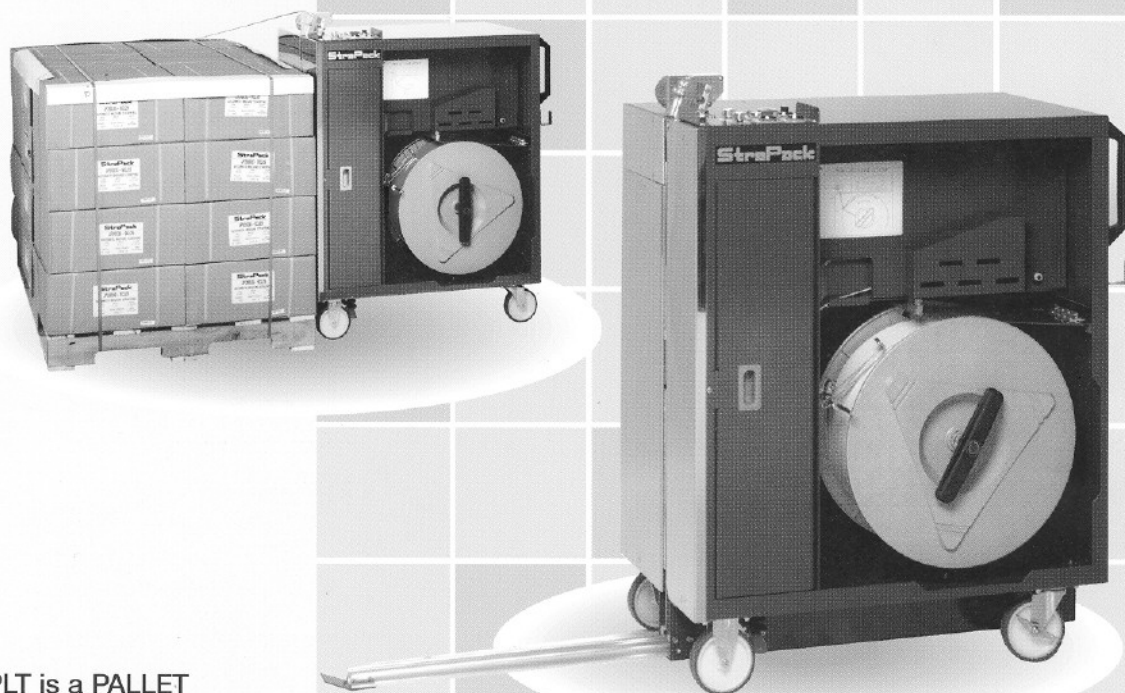

RQ-8Y/PLT

■ Portable

StrapPack RQ-8Y/PLT is a PALLET strapping machine, which is mobile and easy to maintain.

■ High Tension

Tension System of StrapPack RQ-8Y/PLT is the TORQUE TENSION System providing max. 980N (100kgf/220 lbsf) tension.

■ Power Supply

Single Phase power supply outlet requires no limitation of strapping operation.

■ Dependable

Strapack's advanced SLIDE ARCH Unit assures perfect strap placement. EXTENSION ARCH Unit (Option, 200mm Extension) provides more possibility of strapping operation.

■ Standard Specifications

Dimensions	Width	1803mm	71 in.
	Height	1158mm	45-5/8 in.
	Depth	560mm	22 in.
	Weight	Approx. 150kg	330 lbs.
Arch Length	901mm	35-1/2 in.	
Minimum Package Size	W200×650H	W7-7/8×H25-5/8 in.	
Strap Tension	980N (100kgf)	980N (220 lbsf)	
Strap Width	Polypropylene, Heavy		
	9, 12, 15.5mm	3/8, 1/2, 5/8 in.	
Power Supply	100, 120, 200, 220, 230, 240V Single Phase 50 / 60Hz 0.56KVA		

Pats., U.M. & design registered and/or pending.
Modification rights reserved.

© 2000 Strapack Corporation

DISTRIBUTED BY:

STRAPACK CORPORATION
1-2-17, Higashi Shinbashi, Minato-ku, Tokyo 105-0021, JAPAN
Phone 81-3-3289-1161 Fax. 81-3-3289-1160
(URL) <http://www.strapack.com>
(E-mail) info@strapack.com

STRAPACK INC.
30860 San Clemente St. Hayward, CA 94544 U.S.A.
Phone 1-510-475-6000 Fax. 1-510-475-6090